# SUB12 COMPACT 12" SUBWOOFER

# SOUND

# FEATURES

- One 12" transducer
- Compact and lightweight
- Extended bass response down to 35 Hz
- Pole cup accessory for sub/satellite configurations

#### **APPLICATIONS**

- Restaurants
- Lounges
- Houses of Worship
  Theaters
- Portable Systems



# DESCRIPTION


The SUB12 is a high-powered, high-performance, passive, reflex bass unit. It is equipped with a single 12" low frequency driver with a 4" voice coil. Its extended bass response goes down to 35 Hz with low distortion. SUB12 is lightweight and has a compact footprint. The enclosure features two recessed NL4 connectors so the sub can be placed directly against a wall.

The SUB12 can be equipped with the Sub Pole Cup accessory, in order to attach an Active Speaker Tube to support a satellite speaker. It is ideal for restaurants and lounges, fitting underneath or in between banquettes, but also in residential applications or portable systems.


# SPECIFICATIONS

Audio Specifications		Mechanical Specifications	
Description:	Compact, passive, reflex bass unit	IP Rating:	IP55 indoor/outdoor and salt water resistant
Bandwidth:	35 Hz - 150 Hz (-6 dB preset dependent)	Rigging:	(4) points M8
Max SPL:	132 dB SPL @ 1 m with preset	Weight:	46.3 lbs / 21 kg
Power:	1200 watts (program)	Construction:	Finland birch ply (urea glue), matte salt and UV resistant coating, 316 stainless steel hardware, 3D spacer mesh fabric
Directivity:	Omnidirectional		
Elements:	(1) 12" neodymium low frequency driver with a 4" voice coil	Dimensions:	15.8" (400 mm) x 14.2" (360 mm) x 20.5" (525 mm)
		Colors:	Stocking black and white, custom colors and fabrics available
Impedance:	8 Ω	Accessories:	s: Sub Pole Cup for an M20 screw-in pole or Active Speaker Tubes, M8 Hanging Kit, removable rubber feet [included]
Connectors:	(2) recessed NL4		

# DIRECTIVITY

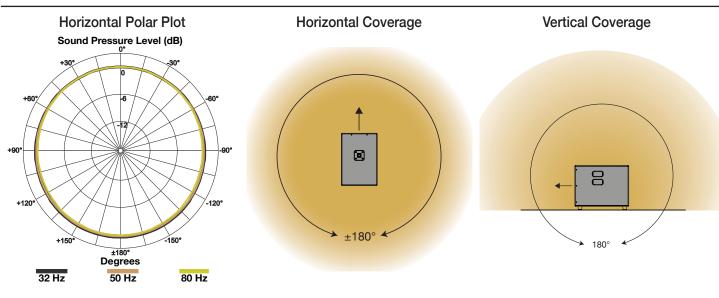

Made in USA

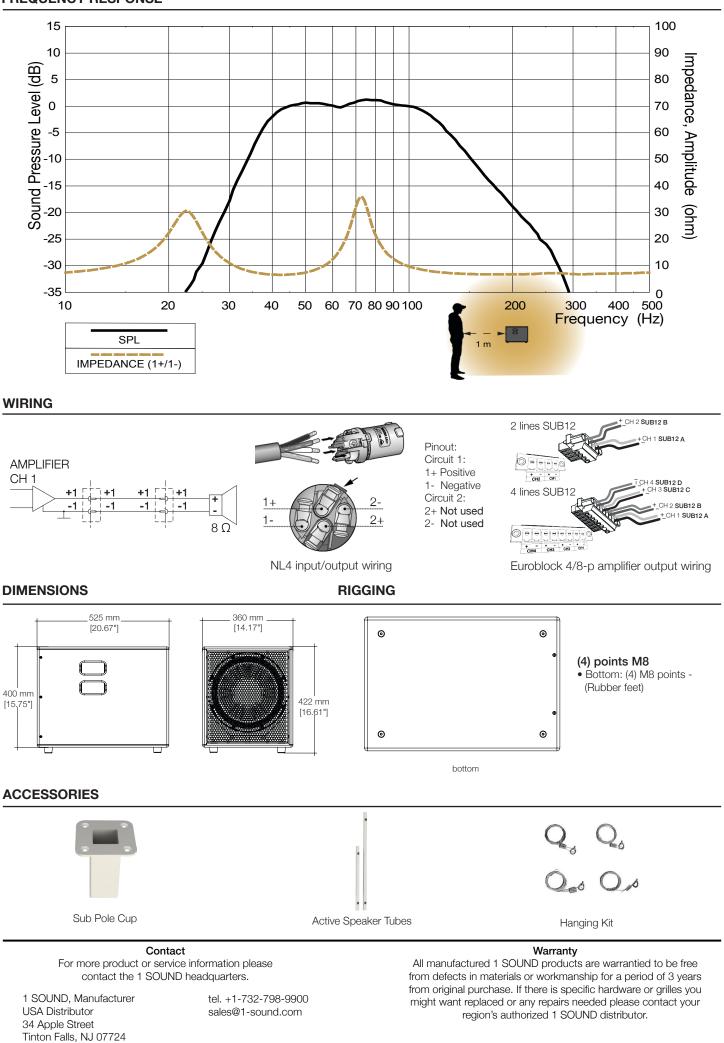

1 SOUND - © 2022 - ALL RIGHTS RESERVED

www.1-sound.com

Made in USA

TECHNICAL DATA SHEET